Hello all,

RIGHTside design has reached out to request a Resolution of Support from the M-22 Byway Committee for the installation of Gateway (boundary) signs along the M-22 corridor as part of the Arcadia Wayfinding Project's community wayfinding and placemaking initiative.

Background Context:

- The project is part of Arcadia Township's broader recreation development plan, which aims to enhance local parks, trails, and recreational access in alignment with the Township Master Plan.
- Phase One (2024) successfully completed improvements across several parks and was funded jointly by the Manistee County Community Foundation and Arcadia Township.
- Phase Two focuses on wayfinding signage and beach protection to improve navigation, promote local recreation assets, and enhance Arcadia's visual appeal along M-22.
- The wayfinding component has financial and organizational backing from the Manistee County Tourism Authority and the Manistee County Community Foundation.

Because M-22 is a state-designated Pure Michigan Byway the Michigan Department of Transportation requires that the Arcadia Wayfinding Project secure a formal Resolution of Support from the M-22 Byway Committee before Gateway signs can be installed.

In summary, the committee is being asked to formally endorse the Arcadia Wayfinding Project's signage plan to meet MDOT's approval requirements for installations along the M-22 corridor.


Please reach out if you have any questions or concerns.

Cassidy Robarts

Transportation Planner

Networks Northwest 600 E. Front St, Suite 205, Traverse City, MI 49686



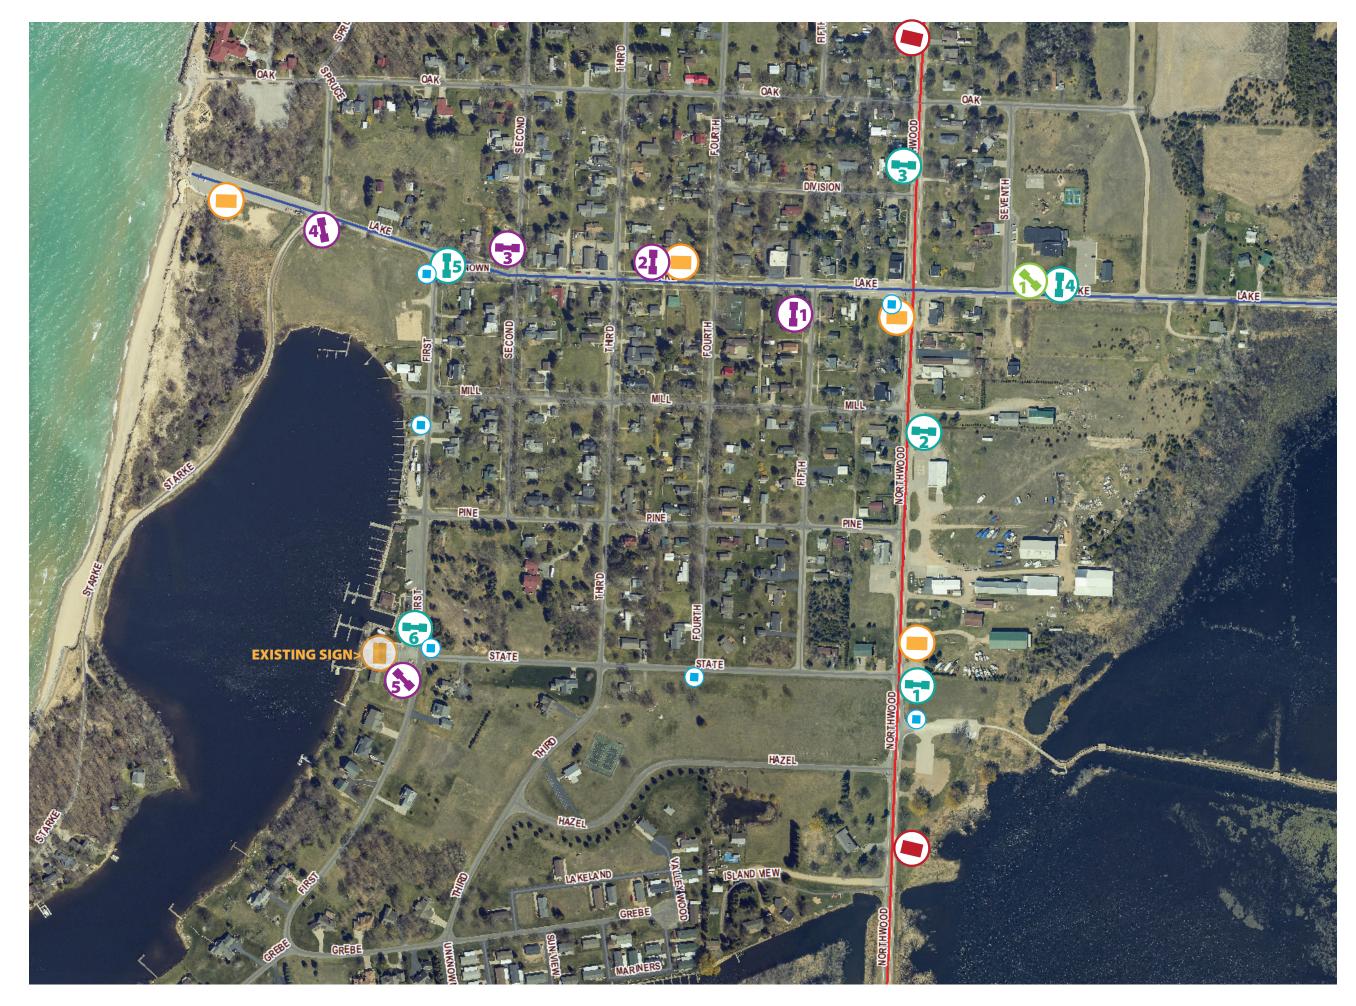



- ★ Lake Michigan Overlook
- **←** Marina
- **←** Parks



DETAILS

Located after GTRLC Access Drive Northbound M-22

6'x1' - 6sf - die cut top max 6sf permitted (header)

6'x4.5' - 27sf (1" radius corners) max 32sf permitted (body)

Posts - 4x6 PT wood w/ MDOT required mounting/breakaways

MEETS MDOT COMPLIANCE BASED ON SPECIFICATION - NEED TO SEND FOR REVIEW



- **←** Beach and Parks
- **←** Museum

Community Center



DETAILS

Located prior to Mill St. intersection Northbound M-22

6'x1' - 6sf - die cut top max 6sf permitted (header)

6'x5' - 30sf (1" radius corners) max 32sf permitted (body)

Posts - 4x6 PT wood w/ MDOT required mounting/breakaways

MEETS MDOT COMPLIANCE BASED ON SPECIFICATION - NEED TO SEND FOR REVIEW



Arcadia
Marsh Access

Beach and Parks

Museum



DETAILS

Located open space, two homes north of Oak Street, Southbound M-22

6'x1' - 6sf - die cut top max 6sf permitted (header)

6'x5' - 30sf (1" radius corners) max 32sf permitted (body)

Posts - 4x6 PT wood w/ MDOT required mounting/breakaways

MEETS MDOT COMPLIANCE BASED ON SPECIFICATION - NEED TO SEND FOR REVIEW



DETAILS

Located open space, in front of Arcadia Comm. Ctr. Westbound Glovers Lake Rd.

6'x1' - 6sf - die cut top max 6sf permitted (header)

6'x5' - 30sf (1" radius corners) max 32sf permitted (body)

Posts - 4x6 PT wood w/ MDOT required mounting/breakaways

Does not need to meet MDOT compliance but is rated as such due to speed of Glovers Lake Road.



- **←** Arcadia Marsh
- ★ Beach and Parks
- **↑** Museum

Overlook





- **↑** Arcadia Beach 👬
- **←** Veterans Memorial Marina 🛌
- **←** Grebe Park

Westbound Face



- Community Center
- **↑**Finch Park

Marina **►**





Grebe Park









East bound Face



DETAILS

Located at "triangle" leading to Arcadia Beach

3'x6' - powdercoated alum. frame with slide in fully reflective panel

Posts - 144" total alum, powdercoated and direct burried.

Needs to be reviewed/approved by local gov't/planning department



- Arcadia
 Beach
- **↑** Finch Park
- **↑** Pickert Park
- **←** Veterans Memorial Marina

Northbound Face



Grebe Park







Southbound Face



DETAILS

Located near Grebe Park on Marina Side of First Street

3'x6' - powdercoated alum. frame with slide in fully reflective panel

Posts - 144" total alum, powdercoated and direct burried.

Needs to be reviewed/approved by local gov't/planning department





60" panel width

30" panel height



60" total height above grade

Arcadia Museum Perpendicular Mount Monument

Sign may require review and approval by MDOT, Road Commission, etc. *Material and design subject to change







Pickert Park - Perpendicular Mount Monument

Sign may require review and approval by MDOT, Road Commission, etc. *Material and design subject to change







60" total height above grade

Arcadia Beach - Perpendicular Mount Monument

Sign may require review and approval by MDOT, Road Commission, etc. *Material and design subject to change





Grebe Park - Perpendicular Mount Monument

Sign may require review and approval by MDOT, Road Commission, etc. *Material and design subject to change



60" panel width

30" panel height



60" total height above grade

Comm. Ctr. - Single Sided Angle Mount @ Road

Sign may require review and approval by MDOT, Road Commission, etc. *Material and design subject to change

80" total height above grade

30" panel

height

72" panel width



Recreation. Education. Community. ArcadiaCC.org

Manistee Tourism Visitor Information

Manistee County Library

0

⁹

· **&** _



Sign may require review and approval by MDOT, Road Commission, etc. *Material and design subject to change

72" panel width



84" total height above grade

HDPE wood wrap footer full wrap additional center post added for support

